


High Speed Collet Chuck

BT - HPS

콜렛척

고속, 고파워 Chuck Balanced G6.3, Max. 15,000rpm

MAS403-BT

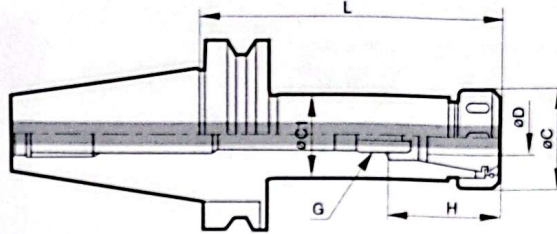

Designation	ØD	ØC	ØC1	L	H	Collet	G	Range	kg	Max.rpm	Stock
BT50 - HPS 7 - 90				90					3.8		
120	1.0~7.0	19	19	120	33	GER11	M7	0.5	3.9		
165				165					4.0		
HPS 10 - 90				90					3.8		
120	1.0~10.0	32	31	120	44.5	GER16	M10		4.0		
165				165					4.2		•
HPS13 - 75				75					3.8		
105	1.0~13.0	35	35	105	49	GER20	M13		3.9	8,000	•
165				165				1.0	4.2		•
HPS16 - 75				75					3.9		
105	1.0~16.0	42	42	105	50	GER25	M18		4.1		•
165				165					4.2		•
HPS20 - 75				75					4.0		•
105	2.0~20.0	50	44	105	60	GER32	M22		4.4		•
165				165					4.8		•

- Coolant 사용시에는 관통형 플스터드 볼트와 방수형 콜렛을 조합해서 사용하시기 바랍니다. (ER OO-ØC)
- 오일홀타입 사용시 Collet은 정치수로 사용하여 주십시오.
- Collet은 용도에 따라 다양하게 선택 : 87~89page 참조.
- 스패너는 별도 판매.

- Pull std bolt & water-proof collet should be adopted for coolant system. (ER OO-ØC)
- Please choose right size in the case of using oilhole type
- Collet : see page 87~89
- Spanner is option.

주문예 Ordering example

- ø6 Oil Hole Type Drill사용시, Collet : ER20-6C
- ER20-6C should be adopted in the case of drill ø6

주문예 Ordering example

- Standard type : BT30-HPS7-75

Spare Part

Type	Basic		Option	
	Sleeve Bearing Type Nut	Adjust Screw	Spanner	(G)ER Collet
HPS7	RN11	BN0716F	20-22	GER 11-øD
HPS10	RN16	BN1025F	32-35	GER 16-øD
HPS13	RN20	BN1325F	35-38	GER 20-øD
HPS16	RN25	BN1830F	42-46	GER 25-øD
HPS20	RN32	BN2230F	48-52	GER 32-øD

2 Face Constrained
2면 구속 타입CHUCK
척ARBOR
아바ANGULAR HEAD
앵글라 헤드BORING TOOL
보링툴MODULAR
모듈러 시스템cBN/PCD
cBN/PCDOTHER
기타