


# REVOLVING CENTER CNC HEAVY DUTY - R MODEL INTERCHANGEABLE EXTENDED POINT

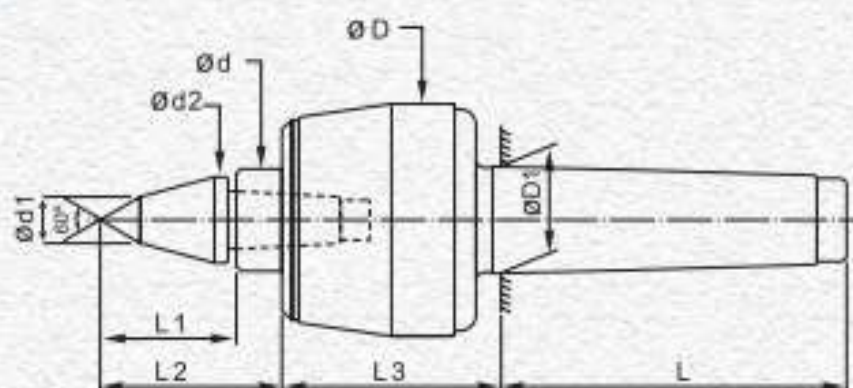

| Part No.             | Shank Taper | Point Style    | Internal Female Style | Ød mm | Ød1 mm | Ød2 mm | ØD mm | ØD1 mm | L1 mm | L2 mm | L3 mm | L mm  | Max. Job Wt. kg. | Conc. Error mm | Max. RPM |
|----------------------|-------------|----------------|-----------------------|-------|--------|--------|-------|--------|-------|-------|-------|-------|------------------|----------------|----------|
| HSC MT3 CNC HDR INTE | MT-3        | Extended Point | 1:10                  | 28    | 12     | 22     | 62    | 23.825 | 36.5  | 46.5  | 62.5  | 81.0  | 100              | 0.010          | 5000     |
| HSC MT4 CNC HDR INTE | MT-4        | Extended Point | 1:10                  | 32    | 14     | 26     | 68    | 31.267 | 42.5  | 52.5  | 65.0  | 102.5 | 200              | 0.010          | 3800     |
| HSC MT5 CNC HDR INTE | MT-5        | Extended Point | 1:10                  | 38    | 16     | 32     | 87    | 44.399 | 52.0  | 62.0  | 80.5  | 129.5 | 400              | 0.010          | 3000     |