



BT-MD

Modular arbor



Fig.1


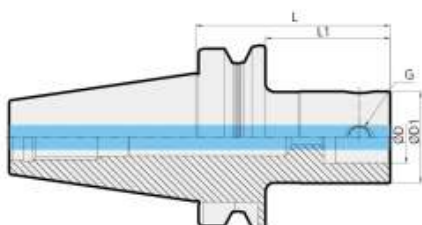


Fig.2

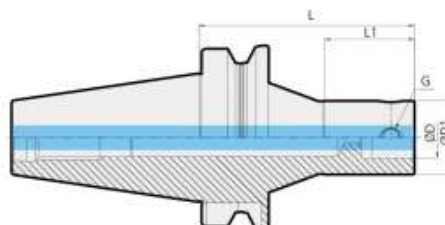

• For more information on the related parts, see **131p**

	Model No.	ØD	ØD1	L	L1	G	Fig.	Kg	Package weight (Kg)
BT30	BT30-MD19F-70	11	19	70	45	M5	1	0.5	0.5
	BT30-MD25F-90	14	25	90	63	M6	1	0.6	0.7
	BT30-MD32F-80	18	32	80	55	M8	1	0.7	0.7
	BT30-MD40F-45	22	40	45	22	M10	1	0.5	0.6
	BT30-MD40F-60	22	40	60	36	M10	1	0.7	0.7
	BT30-MD40F-80	22	40	80	56	M10	1	0.9	0.9
	BT30-MD50F-70	28	50	70	48	M12	1	0.9	1.0
BT40	BT40-MD19F-70	11	19	70	40	M5	1	1.0	1.2
	BT40-MD25F-95	14	25	95	63	M6	1	1.1	1.3
	BT40-MD25F-105R	14	25	105	40	M6	2	1.2	1.4
	BT40-MD32F-100	18	32	100	70	M8	1	1.2	1.5
	BT40-MD32F-115R	18	32	115	45	M8	2	1.5	1.8
	BT40-MD40F-60	22	40	60	31	M10	1	1.1	1.3
	BT40-MD40F-110R	22	40	110	60	M10	2	1.6	1.9
	BT40-MD40F-115	22	40	115	83	M10	1	1.6	1.8
	BT40-MD50F-105	28	50	105	73	M12	1	1.8	2.1
	BT40-MD63F-64	36	63	64	37	M16	1	1.5	1.7
	BT40-MD63F-110	36	63	110	83	M16	1	2.4	2.6
	BT40-MD63F-135	36	63	135	108	M16	1	3.0	3.3
	BT40-MD80F-100	45	80	100	73	M16	1	2.9	3.1

C Internal coolant system installed.



BT-MD

Modular arbor



Fig.1


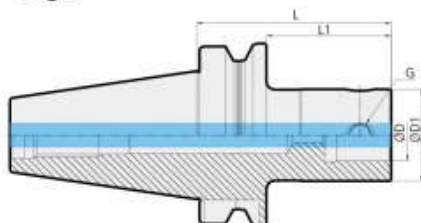


Fig.2

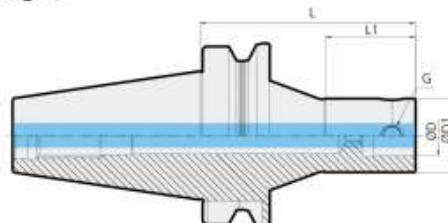

• For more information on the related parts, see **131p**

	Model No.	ØD	ØD1	L	L1	G	Fig.	Kg	Package weight (Kg)
BT50	BT50-MD19F-85	11	19	85	44	M5	1	3.7	4.0
	BT50-MD25F-105	14	25	105	62	M6	1	3.8	4.1
	BT50-MD25F-120R	14	25	120	40	M6	2	3.8	4.1
	BT50-MD32F-110	18	32	110	67	M8	1	4.0	4.3
	BT50-MD32F-115R	18	32	115	45	M8	2	4.1	4.5
	BT50-MD32F-235R	18	32	235	115	M8	2	5.5	5.9
	BT50-MD40F-60	22	40	60	22	M10	1	3.7	4.0
	BT50-MD40F-195	22	40	195	152	M10	1	4.8	5.2
	BT50-MD40F-230R	22	40	230	180	M10	2	5.0	5.4
	BT50-MD50F-125	28	50	125	82	M12	1	4.6	5.0
	BT50-MD50F-225	28	50	225	182	M12	1	6.0	6.4
	BT50-MD50F-250R	28	50	250	81	M12	2	7.0	7.4
	BT50-MD63F-75	36	63	75	35	M16	1	4.2	4.5
	BT50-MD63F-130	36	63	130	87	M16	1	5.3	5.7
	BT50-MD63F-195	36	63	195	152	M16	1	6.8	7.2
	BT50-MD63F-230	36	63	230	187	M16	1	7.5	7.9
	BT50-MD80F-75	45	80	75	36	M16	1	4.3	4.6
	BT50-MD80F-110	45	80	110	69	M16	1	5.7	6.0
	BT50-MD80F-175	45	80	175	134	M16	1	8.0	8.4
	BT50-MD90F-75	45	90	75	34	M16	1	4.8	5.1
	BT50-MD90F-145	45	90	145	104	M16	1	7.4	7.8
	BT50-MD90F-195	45	90	195	154	M16	1	9.4	9.8

C Internal coolant system installed.