



BT-FMA

Face mill arbor



Fig.1

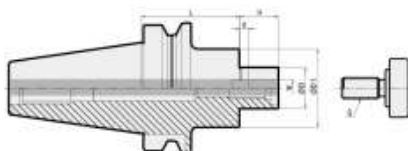


Fig.2

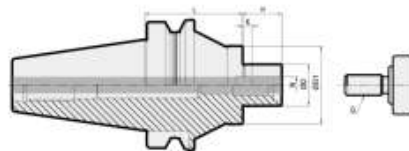


Fig.3


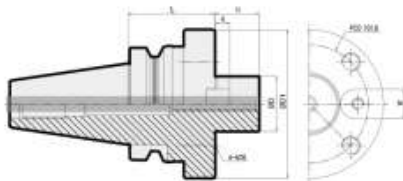


Fig.4

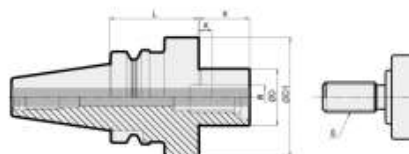

※ The relevant weight excludes the weight of the face cutter.

• For more information on the related parts, see **121p**

	Model No.	Cutter diameter	ØD	ØD1	L	H	W	K	G	Fig.	Kg	Package weight (Kg)
BT30	BT30-FMA25.4-45	80	25.4	50	45	22	9.5	5	M12	4	1.0	1.0
	BT40-FMA25.4-45	80	25.4	50	45	22	9.5	5	M12	1	1.4	1.6
	BT40-FMA25.4-90	80	25.4	50	90	22	9.5	5	M12	1	2.2	2.4
BT40	BT40-FMA31.75-45	100	31.75	60	45	30	12.7	7	M16	1	1.6	1.8
	BT40-FMA31.75-90	100	31.75	60	90	30	12.7	7	M16	1	2.5	2.7
	BT40-FMA38.1-60	125	38.1	80	60	34	15.87	9	M20	4	2.6	2.8
BT50	BT50-FMA25.4-45	80	25.4	50	45	22	9.5	5	M12	1	4.0	4.3
	BT50-FMA25.4-90	80	25.4	50	90	22	9.5	5	M12	1	4.7	5.0
	BT50-FMA25.4-150	80	25.4	50	150	22	9.5	5	M12	2	6.4	6.8
	BT50-FMA31.75-45	100	31.75	60	45	30	12.7	7	M16	1	4.1	4.4
	BT50-FMA31.75-75	100	31.75	60	75	30	12.7	7	M16	1	4.8	5.1
	BT50-FMA31.75-105	100	31.75	60	105	30	12.7	7	M16	2	5.6	5.9
	BT50-FMA38.1-45	125	38.1	80	45	34	15.87	9	M20	1	4.4	4.7
	BT50-FMA38.1-75	125	38.1	80	75	34	15.87	9	M20	1	5.6	5.9
	BT50-FMA50.8-45	160	50.8	100	45	36	19.05	10	M24	1	4.9	5.2
	BT50-FMA50.8-75	160	50.8	100	75	36	19.05	10	M24	1	6.8	7.1
	BT50-FMA47.625-75	200	47.625	128	75	38	25.4	12.5	-	3	8.3	8.6

□ Internal coolant system is optional.