


PIPE CENTER - BLUNT

60° Angle Revolving Cone (Not Dead)

(For Conventional Slow Speed
Non CNC Application)

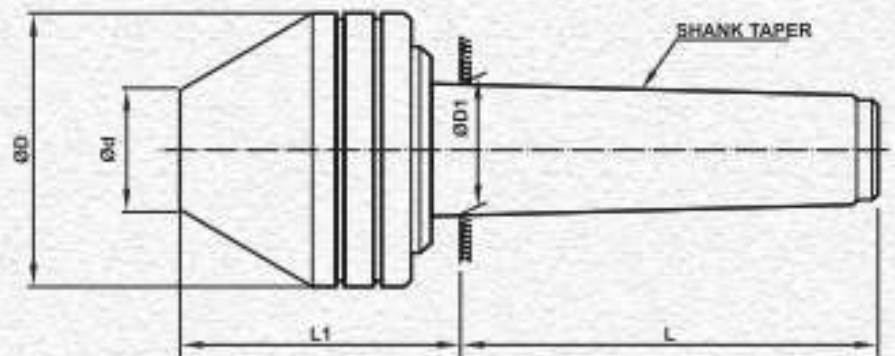

Part No.	Shank Taper	Ød mm	ØD mm	ØD1 mm	L mm	L1 mm	Conc. Error mm	Max. RPM
PC MT2 25-50	MT-2	25	55	17.780	64.0	65.0	0.015	750
PC MT2 30-65	MT-2	30	65	17.780	64.0	66.0	0.015	750
PC MT2 40-75	MT-2	40	77	17.780	64.0	69.0	0.015	600
PC MT3 25-50	MT-3	25	55	23.825	81.0	65.0	0.015	750
PC MT3 30-65	MT-3	30	65	23.825	81.0	66.0	0.015	750
PC MT3 40-75	MT-3	40	77	23.825	81.0	69.0	0.015	600
PC MT3 50-90	MT-3	50	90	23.825	81.0	70.0	0.015	600
PC MT3 65-100	MT-3	65	102	23.825	81.0	70.0	0.015	500
PC MT3 35-125	MT-3	35	127	23.825	81.0	133.5	0.015	350
PC MT3 75-125	MT-3	75	127	23.825	102.5	98.5	0.015	350

Part No.	Shank Taper	Ød mm	ØD mm	ØD1 mm	L mm	L1 mm	Conc. Error mm	Max. RPM
PC MT4 25-50	MT-4	25	55	31.267	102.5	67.5	0.015	750
PC MT4 30-65	MT-4	30	65	31.267	102.5	68.5	0.015	750
PC MT4 40-75	MT-4	40	77	31.267	102.5	70.5	0.015	600
PC MT4 50-90	MT-4	50	90	31.267	102.5	71.5	0.015	600
PC MT4 65-100	MT-4	65	102	31.267	102.5	71.5	0.015	500
PC MT4 35-125	MT-4	35	127	31.267	102.5	128.0	0.015	350
PC MT4 75-125	MT-4	75	127	31.267	102.5	93.0	0.015	350
PC MT4 75-150	MT-4	75	153	31.267	102.5	98.0	0.015	300
PC MT4 100-175	MT-4	100	178	31.267	102.5	128.0	0.015	250
PC MT4 100-200	MT-4	100	204	31.267	102.5	128.0	0.015	250
PC MT5 25-50	MT-5	25	55	44.399	129.5	67.5	0.015	750
PC MT5 30-65	MT-5	30	65	44.399	129.5	68.5	0.015	750
PC MT5 40-75	MT-5	40	77	44.399	129.5	71.5	0.015	600
PC MT5 50-90	MT-5	50	90	44.399	129.5	72.5	0.015	600
PC MT5 65-100	MT-5	65	102	44.399	129.5	72.5	0.015	500
PC MT5 35-125	MT-5	35	127	44.399	129.5	129.5	0.015	350
PC MT5 75-125	MT-5	75	127	44.399	129.5	94.5	0.015	350
PC MT5 75-150	MT-5	75	153	44.399	129.5	99.0	0.015	300
PC MT5 100-175	MT-5	100	178	44.399	129.5	128.0	0.015	250
PC MT5 100-200	MT-5	100	204	44.399	129.5	128.0	0.015	250
PC MT5 100-230	MT-5	100	231	44.399	129.5	145.0	0.015	200
PC MT6 65-100	MT-6	65	102	63.348	182.0	85.0	0.015	500
PC MT6 35-125	MT-6	35	127	63.348	182.0	131	0.015	350
PC MT6 75-125	MT-6	75	127	63.348	182.0	96.0	0.015	350
PC MT6 75-150	MT-6	75	153	63.348	182.0	101.0	0.015	300
PC MT6 100-175	MT-6	100	178	63.348	182.0	123.5	0.015	250
PC MT6 100-200	MT-6	100	204	63.348	182.0	123.5	0.015	250
PC MT6 100-230	MT-6	100	231	63.348	182.0	140.0	0.015	200
PC MT6 200-275	MT-6	200	275	63.348	182.0	130.0	0.015	150