


PIPE CENTER - POINTED

60° Angle Revolving Cone (Not Dead)

(For Conventional Slow Speed
Non CNC Application)

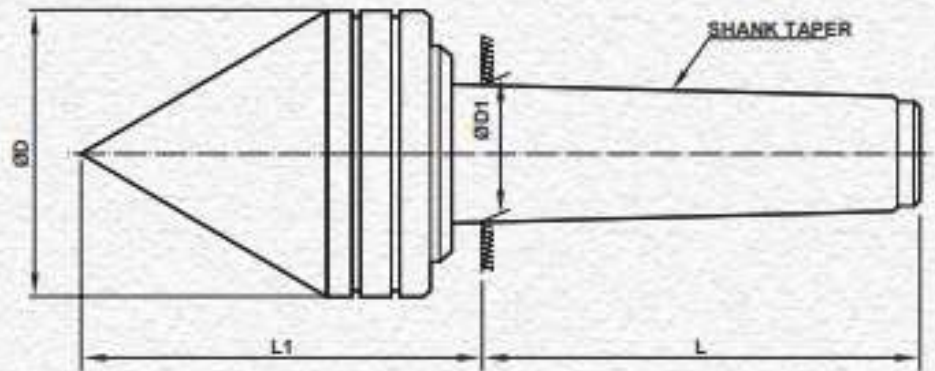

Part No.	Shank Taper	ØD mm	ØD1 mm	L mm	L1 mm	Conc. Error mm	Max. RPM
PC MT2 0-2"	MT-2	55	17.780	64.0	88.0	0.015	750
PC MT2 0-2 1/2"	MT-2	65	17.780	64.0	91.0	0.015	750
PC MT2 0-3"	MT-2	77	17.780	64.0	102.0	0.015	600
PC MT3 0-2"	MT-3	55	23.825	81.0	88.0	0.015	750
PC MT3 0-2 1/2"	MT-3	65	23.825	81.0	91.0	0.015	750
PC MT3 0-3"	MT-3	77	23.825	81.0	102.0	0.015	600
PC MT3 0-3 1/2"	MT-3	90	23.825	81.0	115.0	0.015	600
PC MT3 0-4"	MT-3	102	23.825	81.0	115.0	0.015	500
PC MT3 0-5"	MT-3	127	23.825	81.0	163.5	0.015	350
PC MT4 0-2"	MT-4	55	31.267	102.5	90.5	0.015	750
PC MT4 0-2 1/2"	MT-4	65	31.267	102.5	93.5	0.015	750
PC MT4 0-3"	MT-4	77	31.267	102.5	103.5	0.015	600
PC MT4 0-3 1/2"	MT-4	90	31.267	102.5	116.5	0.015	600
PC MT4 0-4"	MT-4	102	31.267	102.5	116.5	0.015	500
PC MT4 0-5"	MT-4	127	31.267	102.5	158.0	0.015	350
PC MT5 0-2"	MT-5	55	44.399	129.5	90.5	0.015	750
PC MT5 0-2 1/2"	MT-5	65	44.399	129.5	93.5	0.015	750
PC MT5 0-3"	MT-5	77	44.399	129.5	104.5	0.015	600
PC MT5 0-3 1/2"	MT-5	90	44.399	129.5	117.5	0.015	600
PC MT5 0-4"	MT-5	102	44.399	129.5	117.5	0.015	500
PC MT5 0-5"	MT-5	127	44.399	129.5	159.0	0.015	350
PC MT6 0-4"	MT-6	102	63.348	182.0	130.0	0.015	500
PC MT6 0-5"	MT-6	127	63.348	182.0	161.0	0.015	350