

RM4PC(M)4000




Fig. 1

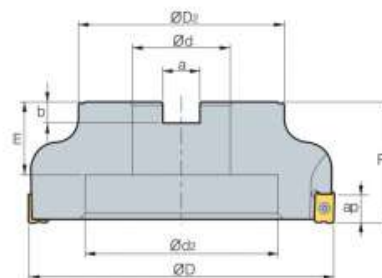


Fig. 2



AA
90°

• AR: -6°
• RR: -19°~ -13°

(mm)

Designation			OD	OD2	Ød	Ød1	Ød2	a	b	E	F	ap		Bolt	Fig.
RM4PCM	4040HR	3	40	36	16	11	18	8.4	5.6	19	40	14	0.23	SB0825	1
	4050HR	3	50	46	22	11	18	10.4	6.3	20	40	14	0.36	SB1025	1
	4050HR-M	4	50	46	22	11	18	10.4	6.3	20	40	14	0.35	SB1025	1
	4050HR-H	5	50	46	22	11	18	10.4	6.3	20	40	14	0.36	SB1025	1
	4063HR	4	63	49	22	11	18	10.4	6.3	20	40	14	0.56	SB1025	1
	4063HR-M	6	63	49	22	11	18	10.4	6.3	20	40	14	0.57	SB1025	1
RM4PC (RM4PCM)	4080HR	5	80	57	25.4 (27)	14	20	9.5 (12.4)	6.0 (7.0)	25 (23)	50	14	1.18 (1.16)	SB1230	1
	4080HR-M	7	80	57	25.4 (27)	14	20	9.5 (12.4)	6.0 (7.0)	25 (23)	50	14	1.17 (1.14)	SB1230	1
	4080HR-H	8	80	57	25.4 (27)	14	20	9.5 (12.4)	6.0 (7.0)	25 (23)	50	14	1.17 (1.14)	SB1230	1
	4100HR	5	100	67	31.75 (32)	18	26	12.7 (14.4)	8.0 (8.0)	33 (25)	63 (50)	14	2.35 (1.84)	SB1630	1
	4100HR-M	8	100	67	31.75 (32)	18	26	12.7 (14.4)	8.0 (8.0)	33 (25)	63 (50)	14	2.31 (1.82)	SB1630	1
	4100HR-H	9	100	67	31.75 (32)	18	26	12.7 (14.4)	8.0 (8.0)	33 (25)	63 (50)	14	2.31 (1.82)	SB1630	1
	4125HR	7	125	87	38.1 (40)	22	32	15.9 (16.4)	10 (9.0)	35 (30)	63	14	3.87 (3.79)	SB2040	1
	4125HR-M	10	125	87	38.1 (40)	22	32	15.9 (16.4)	10 (9.0)	35 (30)	63	14	3.82 (3.70)	SB2040	1
	4160R	8	160	107	50.8 (40)	-	100	19 (16.4)	11 (9.0)	38 (32)	63	14	5.0 (4.75)	MBA	2
	4160R-M	12	160	107	50.8 (40)	-	100	19 (16.4)	11 (9.0)	38 (32)	63	14	4.97 (4.71)	MBA	2

()Metric size

Available inserts

LNEX-MA



LNM(E)X-MF



LNM(E)X-MM



Designation	Cermet	Coated								Uncoated	page
		CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2010	PC3600	
LNEX	151004PNR-MF										E11
	151004PNR-MM										
	151004PNR-MA										
	151008PNR-MF										
	151008PNR-MM										
	151008PNR-MA										
	151016PNR-MF										
	151016PNR-MM										
Designation	Cermet	Coated								Uncoated	page
		CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2010	PC3600	
LNMX	151004PNR-MF										E11
	151004PNR-MM										
	151008PNR-MF										
	151008PNR-MM										
	151016PNR-MF										
	151016PNR-MM										

Available arbors

Designation	Available arbors	
	RM4PC	RM4PCM
RM4PC(M) 4050HR	-	BT□□-FMC22-□□
4050HR-M		
4063HR		
4063HR-M		
4080HR	BT□□-FMA25.4-□□	BT□□-FMC27-□□
4080HR-M		

Designation	Available arbors	
	RM4PC	RM4PCM
RM4PC(M) 4100HR	BT□□-FMA31.75-□□	BT□□-FMC32-□□
4100HR-M		
4125HR	BT□□-FMA38.1-□□	BT□□-FMB40-□□
4125HR-M		
4160R	BT□□-FMA50.8-□□	BT□□-FMC40-□□
4160R-M		

Parts

Specification	Screw	Wrench
Ø50~Ø160	FTKA0412B	TW15S

Available Inserts E11 Available arbors and bolt E400~E402

